




MC-5L1366



**01 Super & Even Cooling**

70Mins Rapid Cooling( 32°C→4°C)&±1 Uniformity



**02 Auto Humidity Stabilization**

Auto-Maintains 35%-75% RH (Ambient 16°C-32°C)



**03 Energy Saving & Silence**



5.9KW/24h Power Consumption & 35dB Low Noise




**04 Dual-Safety Guard**

Dual Independent Inverter Cooling Systems/No Frost  
24/7 Sample Protection with Backup Redundancy

■ Typical Performance Characteristics at 25 °C Ambient

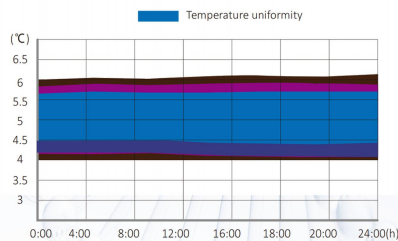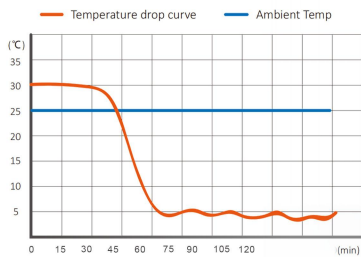

■ Top Cooling System

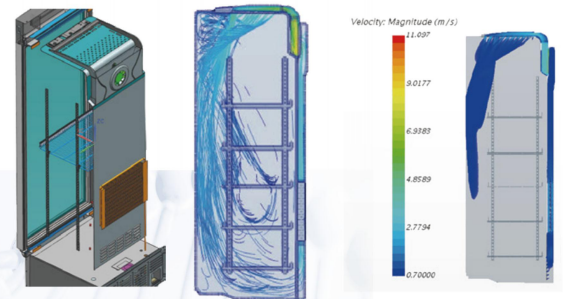

■ Dual Display



**01**  
304 Stainless Steel Interior

**03**  
LI-ION

Li Backup  
Maintenance-free;  
40Hr Alarm Protection.



**05**  
CFC Free  
Natural Hydrocarbon (HC)  
Cooling System



**02**  
Multiple alarms  
audible/visual/remote/  
powerfailure/sensor/dooropen/  
(Ambient/high/low )temp./  
battery monitoring




**04**  
Equipped with  
10-Point Sensors  
Ensures ±0.1°C Temp & ±1% RH  
Accuracy



**06**  
5 Swivel Casters  
+ 2 Adjustable  
Leveling Feet

# Midea 2-8°C Pharmacy refrigerator

	Product Image	
	Series	3rd Generation
Item	Model No.	MC-5L1366
Dimensions	Load capacity (40HQ)	15
	Fridge Storage Volume(L)	1366
	External Material	PCM Steel Plate
	Internal Material	304 Stainless Steel
	Product Dimensions(mm)(wxdxh)	1500*895*1925
	Interior Dimensions(mm)(wxdxh)	1410*660*1540
	Net/Gross Weight	227/271 kg
Technical data	Cooling Type	Forced air cooling
	Defrost type	auto
	Climate Class	N
	Refrigerant/Amount(g)	R600a/52g*2
	Compressor type	Smart-inverter
	Sensor Qty	10
Product Performance	Temperature Range	2°C ~ 8°C
	Temperature uniformity/°C	±1
	Temperature variation/°C	≤2
	Temperature Accuracy	0.1
Control	Controller	Microprocessor
	Display	LED(Temperature & Humidity)
Electrical data	Rated Current(A)	5
	Rated Power(W)	750
Alarms	Power Failure Alarm	Y
	Sensor Failure Alarm	Y
	Environment Temperature Alarm	Y
	Door ajar Alarm	Y
	High Temperature Alarm	Y
	Low Temperature Alarm	Y
	Remote Alarm	Y
Configuration	Shelves/Drawers Qty	12
	Door	Tempered Glass door/Electrical heating
	Auto close door function	Y
	Label Holder	Y
	Cable Port	Y
	Castors/type	5/Omni-directional 2/Fixed wheels
	USB	Y
	RS-485 Port	Optional
	Printer	Optional
	Backup Battery	Y
Backup Battery endurance	40h	